


## DND-AC Mm6 F TIGER

### Magnetic induction

Distance (mm)*	Magnetic induction (Gauss)**
0 mm	2205
50 mm	1550
100 mm	1136
150 mm	922
200 mm	778
250 mm	654
300 mm	557
350 mm	461
400 mm	359

### Magnetic induction (Gauss chart) - DND-AC Mm6 F TIGER

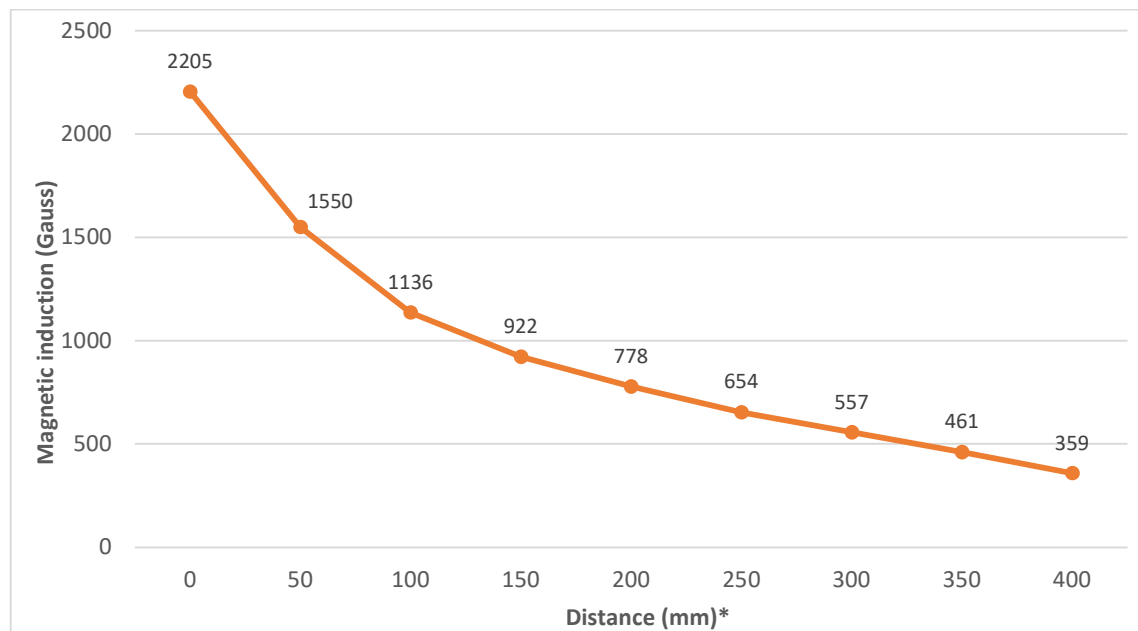

\* \*Measured from the separator belt to the conveyor belt

\*\* Testing without material loading

\*\*\* Measurement axis - in the center of the magnetic core

Magnetic tolerance: +/- 10 %