


DND-AC Ms7 F EKO

Magnetic induction

| Distance (mm)* | Magnetic induction (Gauss)** |
|----------------|------------------------------|
| 0 mm | 2050 |
| 50 mm | 1550 |
| 100 mm | 1053 |
| 150 mm | 720 |
| 200 mm | 530 |
| 250 mm | 380 |
| 300 mm | 290 |
| 350 mm | 210 |
| 400 mm | 160 |

Magnetic induction (Gauss chart) - DND-AC Ms7 F EKO

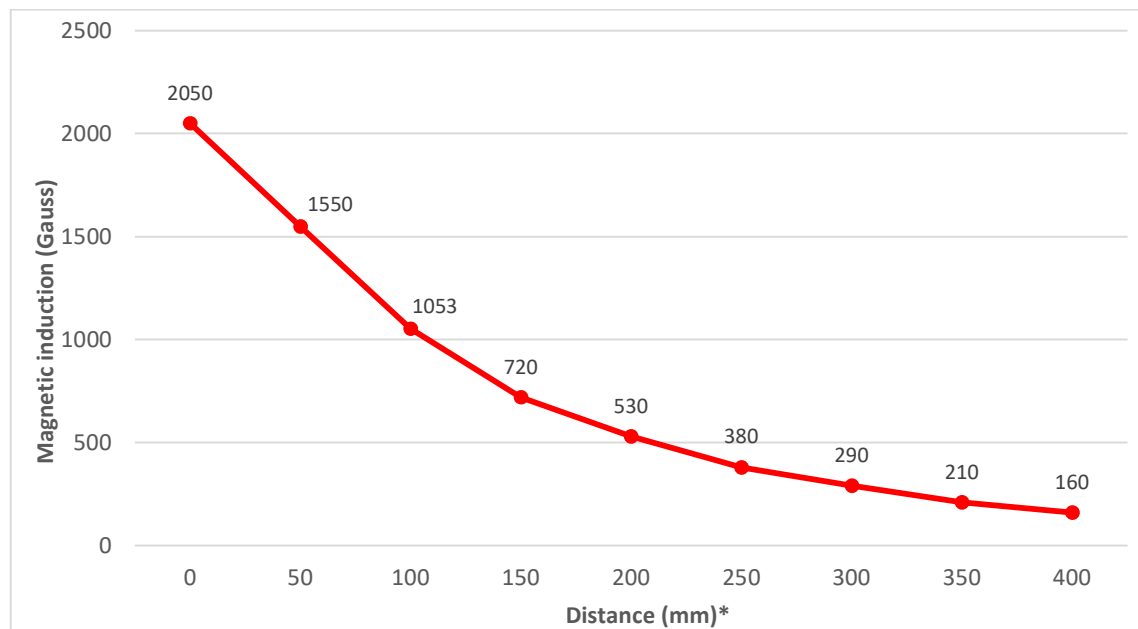

* *Measured from the separator belt to the conveyor belt

** Testing without material loading

*** Measurement axis - in the center of the magnetic core

Magnetic tolerance: +/- 10 %