


## DND-AC Ms8 F EKO

### Magnetic induction

Distance (mm)*	Magnetic induction (Gauss)**
0 mm	2050
50 mm	1550
100 mm	1053
150 mm	720
200 mm	530
250 mm	380
300 mm	290
350 mm	210
400 mm	160

### Magnetic induction (Gauss chart) - DND-AC Ms8 F EKO

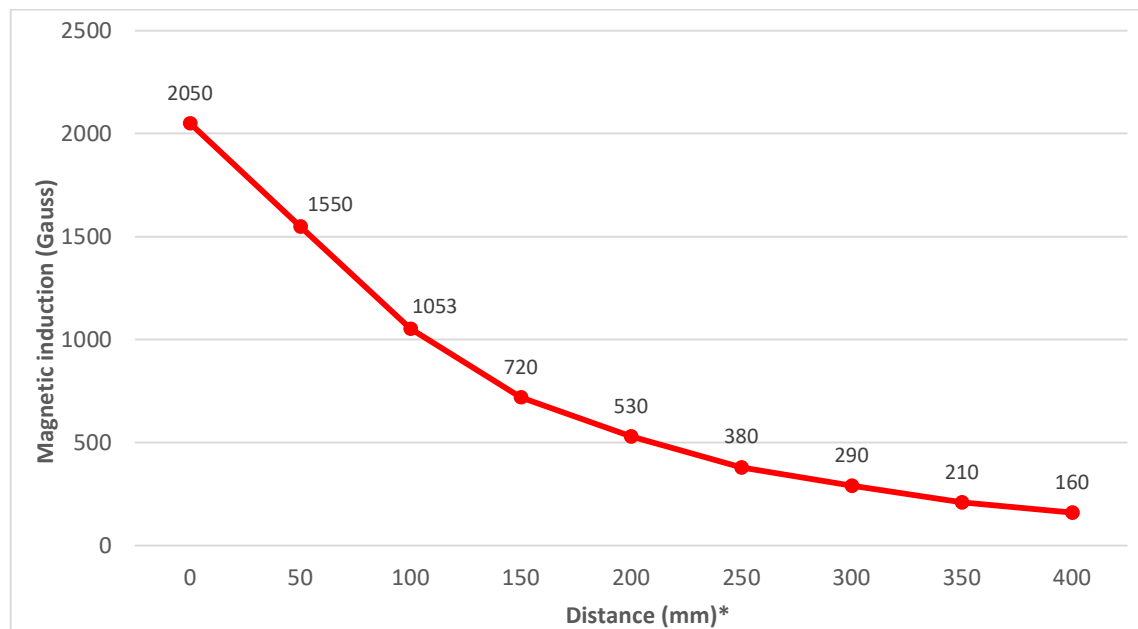

\* \*Measured from the separator belt to the conveyor belt

\*\* Testing without material loading

\*\*\* Measurement axis - in the center of the magnetic core

Magnetic tolerance: +/- 10 %