


## DND-AC Mx4 F BEAST

### Magnetic induction

Distance (mm)*	Magnetic induction (Gauss)**
0 mm	1847
50 mm	1182
100 mm	1027
150 mm	908
200 mm	791
250 mm	697
300 mm	606
350 mm	533
400 mm	471
450 mm	429
500 mm	364

### Magnetic induction (Gauss chart) - DND-AC Mx4 F BEAST

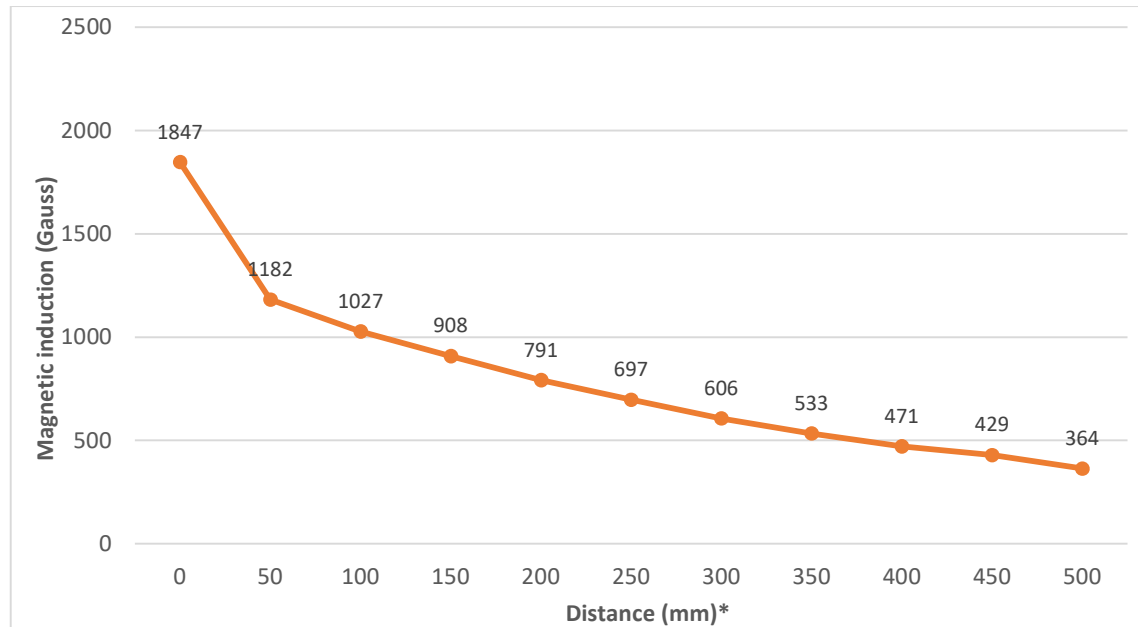

\* \*Measured from the separator belt to the conveyor belt

\*\* Testing without material loading

\*\*\* Measurement axis - in the center of the magnetic core

Magnetic tolerance: +/- 10 %

**SOLLAU s.r.o.**

Hřivínův Újezd 212  
763 07 Velký Orechov  
Czech Republic

Tel.: +420 576 013 873  
E-mail: [info@sollau.cz](mailto:info@sollau.cz)  
Web: [www.sollau.com](http://www.sollau.com)

IN: 29261759  
VAT: CZ29261759