


## DND-AC N3 JACKAL

### Magnetic induction

| Distance (mm)* | Magnetic induction (Gauss)*** |
|----------------|-------------------------------|
| 0 mm           | 2700                          |
| 50 mm          | 1731                          |
| 100 mm         | 1057                          |
| 150 mm         | 664                           |
| 200 mm         | 455                           |
| 250 mm         | 307                           |
| 300 mm         | 264                           |
| 350 mm         | 164                           |
| 400 mm         | 115                           |

### Magnetic induction (Gauss chart) - DND-AC N3 JACKAL

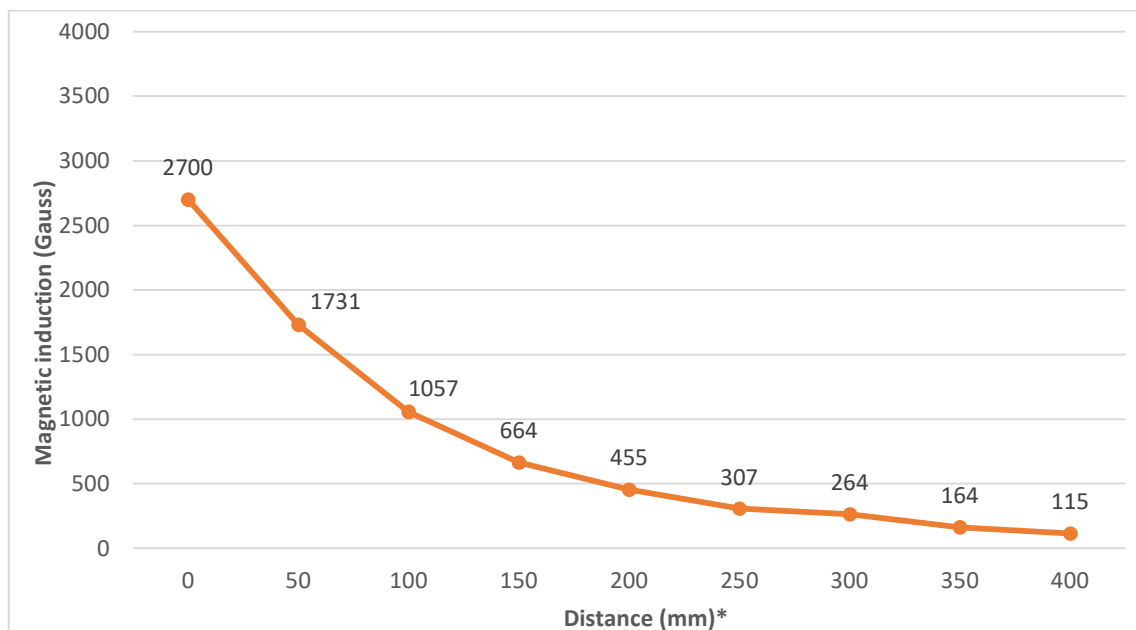

\* \*Measured from the separator belt to the conveyor belt

\*\* Testing without material loading

\*\*\* Measurement axis - in the center of the magnetic core

Magnetic tolerance: +/- 10 %